



# Air handling units

D-AHU Professional  
AIR FLOW RATE 1,100 - 124,000 m<sup>3</sup>/h

All Seasons  
° CLIMATE COMFORT

- Heating
- Air Conditioning
- Applied Systems**
- Refrigeration



# OPTIMAL CONDITIONS THROUGH TAILOR MADE SOLUTIONS

Continual climatic changes caused by the well known issues affecting the environment on a global scale, make comfort conditions and air quality inside buildings today more important than ever, to ensure people's health and well-being. Ideal comfort comes from appropriately controlled temperature, humidity and quality of air introduced into room spaces, that is to say the ability to ensure comfort conditions based on the intended use of the space. For these reasons, in an air conditioning system, the air handling units (AHU) have to be versatile in order to suit the treatment needs for the spaces available for their installation.

Daikin is able to achieve and optimize all of this. Our AHUs are based on a completely modular design, capable of adapting to the needs of a variety of installation types. The design on which the Daikin AHUs are based enables, while maintaining the constructive technology and philosophy, to configure AHUs suitable for application in all market sectors (hospital, pharmaceutical, process industry, civil sector, etc.) through simple structural changes already made available and selectable.

## RANGE

A wide standard range covers air flow rates from 1,100 m<sup>3</sup>/h up to 124,000 m<sup>3</sup>/h, with the possibility to choose the most appropriate transverse velocity, depending on the treatment required. In addition, with the same air flow, the flow section (width x height) can be adapted to the dimensional constraints of the installation. All sizes are modularly constructed to facilitate transport and easy assembly on site. With the absence of any welding points the AHU units, on request, can be supplied completely dismantled to allow assembly directly on site.

### › Pre-defined sizes

Twenty-seven (27) fixed sizes optimized to reach the best compromise between competitiveness and manufacturing standardization.

### › "Infinitely" variable sizes

Designed to overcome installation constraints where space requirements of the section "width x height" must adapt to the available space.

The system gives the possibility to tailor the unit sizes through increments/decrements of 5 cm.





# PRE-DEFINED SIZES

Size	Air Flow Rate (m <sup>3</sup> /h) Speed 2.5 m/s	Width mm	Height mm
1	1,105	850	550
2	1,550	900	600
3	1,980	950	650
4	2,570	1,000	780
5	3,170	1,150	780
6	3,550	1,150	800
7	4,000	1,250	800
8	4,800	1,300	800
9	5,560	1,350	900
10	6,600	1,550	900
11	7,950	1,550	1,100
12	9,320	1,650	1,100
13	10,050	1,650	1,150
14	13,200	1,850	1,400
15	19,200	2,100	1,500
16	25,300	2,650	1,500
17	31,500	2,750	1,750
18	37,000	3,220	1,800
19	43,400	3,090	2,100



## “Infinately” variable sizes: an example


Air Flow Rate (m <sup>3</sup> /h) Speed 2.5 m/s	Width mm	Height mm
<b>45,000</b>	<b>3,050</b>	<b>2,250</b>

20	51,300	3,340	2,250
21	58,000	3,820	2,250
22	67,500	4,040	2,400
23	78,000	4,490	2,450
24	84,700	4,490	2,700
25	98,000	4,890	2,850
26	111,000	5,490	2,850
27	124,000	5,990	3,000




# TECHNICAL CHOICES TO AIM HIGHEST EFFICIENCY

All the units were developed by paying special attention to energy efficiency. Exchange surfaces, motor efficiency, filtration, insulation, friction reduction and pressure drop in the air flow inside the AHU are just some of the most important parameters considered in the development of the design. All of this provides a product ready to be **easily inserted in the system and capable of contributing to overall energy savings.**


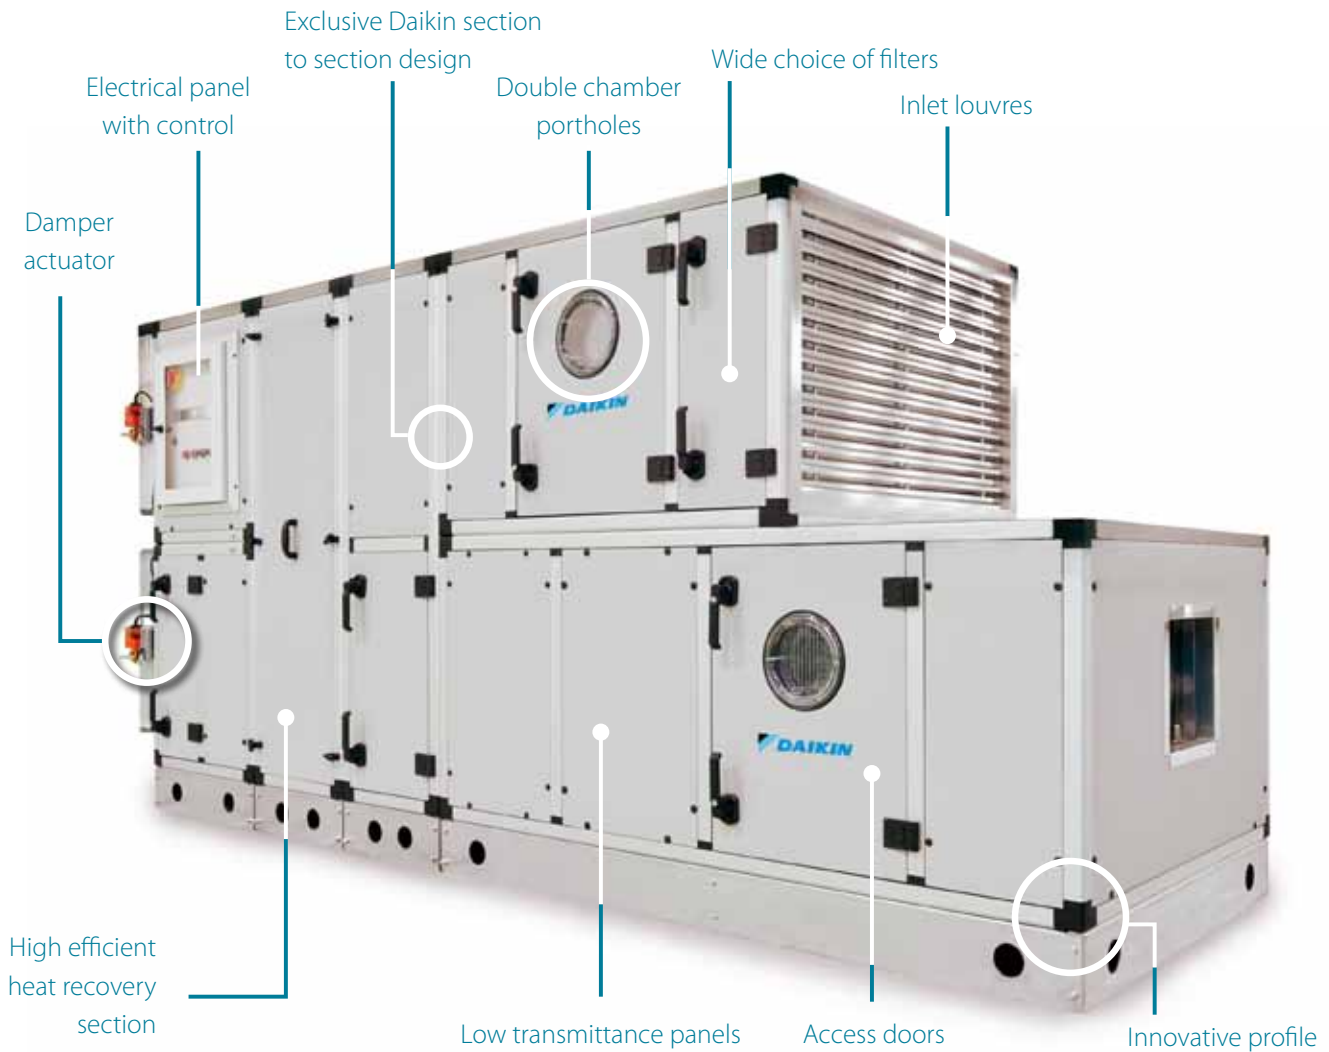


## Section to section design


Traditional design



Daikin design



Aluminium profile with thermal break



Base

## Panels

Flat panel



Mineral wool

Step panel

## Doors





## Frame

Structure with base frame and aluminium or anodised aluminium profiles (recommended for installations in particularly aggressive atmosphere) having a 40x40 or 60x60mm section. Solutions with thermal-break profiles (60x60mm) or with rounded profile (recommended for applications in the food sector or in general, where a high level of hygiene is required) are available. All profiles are the double chamber type so that the fixing screws are totally concealed and there are no projections inside the AHU (in compliance with current accident-prevention regulations), and they are also fitted with a gasket to be inserted inside the profile, in a dovetail slot, to ensure maximum seal. The structure is completed with three-way connecting corners made of glass-reinforced nylon placed on the corners, while the base, independent for each section, is in extruded aluminium with die-cast aluminium angle pieces with facilities for lifting.

## Panels

The closing panels are double skin design, box-folded and can be flat (25 and 46mm thickness) or step type (42 and 62mm thickness). The step panels permit to obtain a flat surface inside the unit, ensuring continuity between the panel and the profile. Insulation can be made of polyurethane foam (40 ÷ 50 kg/ m<sup>3</sup>) or fibrous mineral wool, glued to the panel (90 kg/m<sup>3</sup>).

## Fittings

The fasteners are stainless steel, self-tapping screws, located in nylon bushes and retained in the panel with an external cap. This system completely hides the screws in the panel and thanks to the self-centring screws, the tightness over time is ensured.

## Doors

The doors for inspection and internal service can be provided with outward opening or inward opening for pressurized sections. There are solutions with hinges to allow left or right openings, or even the total removal of the door.

## Portholes

The portholes are double-wall type made of polycarbonate and with sealing gaskets. The fastening system with locking

screws that only enter the polycarbonate structure (and therefore not into the sandwich panel) and the continuous internal-external gasket, prevents the formation of condensation and ensures maximum sealing.

## Handles

Upon request, the door opening handles provided can be adjustable so that the tightness of the seal can be maintained over time. An antifriction band, placed on the profile where the door holds, is always included in order to prevent the wear of the plastic latch (Nylon) after several closure operations.

## Humidification

In the humidification section, when the evaporation pack is utilized, the unit is equipped with a double basin; one removable and the other one cleanable. There are possible solutions for the total extraction of the entire humidification block or just the humidifier evaporating surface section. Alternatively when the nozzle solution is utilized, the unit is equipped with a "humidification chamber" to prevent that water reach the internal part of the panel.

## Filters

Particular attention is paid, during the configuration of the unit, to the position of the filters in the airflow, in order to maximize their effectiveness. All filters are mounted on fixing frames, provided with a seal to ensure an effective filtration efficiency. In addition, all units are designed to allow the extraction of the filters from the dirt side in order to avoid possible contamination with the air circuit during maintenance.

## Fan-Motor assembly

The Fan-Motor is made with a single structure comprising two aluminium profiles with shock absorbers and a motor mounted on a tensioning slide. The structure never touches on the bottom of the unit because through the aluminium profiles transfer the weight onto the structure of the AHU, ensuring the maximum isolation. This solution guarantees that the AHU does not transmit vibrations to any flat surface on which it is installed.


## Portholes



## Handles



## Fan-Motor assembly

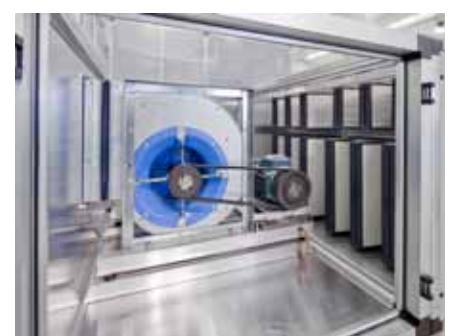

## COMPONENTS

### Filters

- › synthetic pleated filter
- › flat filters in aluminium mesh/stainless steel
- › rigid bag filters
- › soft bag filters
- › high efficiency filters
- › active carbon absorption filters
- › active carbon deodorizing filters

### Exchangers

- › water coils
- › steam coils
- › direct expansion coil
- › superheated water coils
- › electric coils

### Humidifiers

- › surface evaporation humidifiers - constant loss water
- › surface evaporation humidifiers with re-circulating pump
- › water spray humidifiers – constant loss water
- › water spray humidifiers with re-circulating pump
- › steam humidifiers with network distribution (remote)
- › steam humidifiers with local distributor
- › atomized water spray humidifiers

### Fans

- › forward bladed fans
- › backward bladed fans
- › plug fan (also available with direct coupling)

### Heat recovery systems

- › heat wheel, sensible or enthalpy type
- › cross-flow
- › run-around coils

### Other sections

- › air/mixture/discharge intake with:
  - servocontrolled dampers
  - manual dampers
- › empty sections
- › gas burner section
- › section with mufflers

## SOFTWARE

ASTRA is the powerful software package developed to offer a quick and comprehensive service for the customer, in order to make the proper technical choice and economic evaluation of each AHU. It is a complete tool that can configure any type of product and respond exactly to the strictest design needs. The result is a comprehensive economic offer including all the technical data and drawings, the psychometric diagram with the relative air treatment and the fans' performance curves. MECCANO is another, powerful software tool developed and designed to quickly convert the offer to an executable order: i.e., technical drawings to be sent and approved by the client, executive drawings for the production, bill of material, code generation for each component used, are just a few of the many functions of this package.




The ASTRA-MECCANO integration has therefore made possible the complete automated management of the process, to reduce the time of the offer and delivery and improve the service to our customers.

## CONTROL

All units can be provided with accessories for regulation to provide a more comprehensive product and faster installation. These include sensors to measure temperature, humidity and air quality, inverter drives, regulation valves, damper actuators, safety and control devices.



## STANDARD AIR HANDLING UNIT

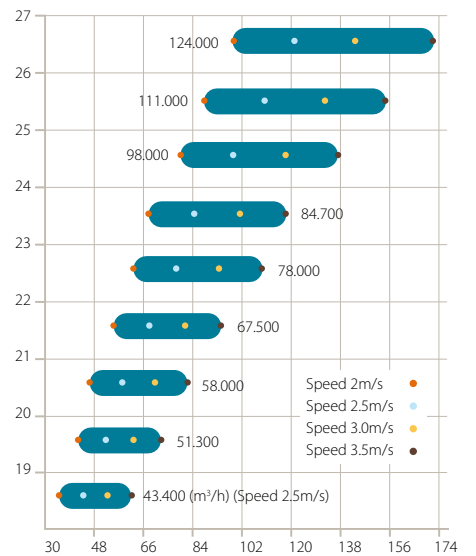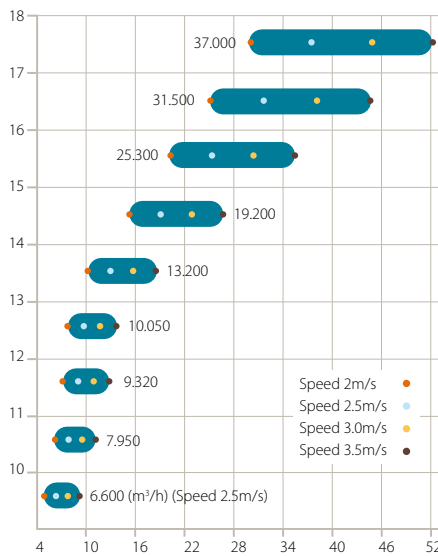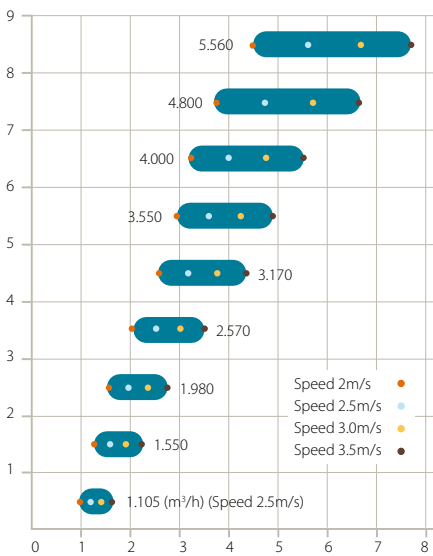



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.



Daikin Europe N.V. participates in the Eurovent Certification programme for Air conditioners (AC), Liquid Chilling Packages (LCP), Fan coil units (FCU) and Air handling units (AHU). Check ongoing validity of certificate online: [www.eurovent-certification.com](http://www.eurovent-certification.com) or using: [www.certiflash.com](http://www.certiflash.com)

FSC

ECPEN11-800

Daikin products are distributed by: